



## **VLDT-UA2-TR**

Dante 2CH USB Audio Encoder/Decoder with PoE



**User Manual**

**VER 1.02**

## Thank you for purchasing this product

Please read these instructions carefully for optimum performance and safety before connecting, operating, or adjusting this product. Please keep this manual for future reference.

## Surge protection device recommended

This product contains sensitive electrical components that electrical spikes may damage, surges, electric shock, lightning strikes, etc. The use of surge protection systems is highly recommended to protect and extend the life of your equipment.

## Table of Contents

1. Introduction.....	1
2. Features.....	1
3. Package Contents.....	1
4. Specifications.....	2
5. Operation Controls and Functions.....	3
6. Application Example.....	4

## 1. Introduction

This Dante 2CH USB Audio Encoder/Decoder is a Dante sound card adapter based on the Dante Ultimo solution. It supports USB audio transmission. A built-in USB sound card chip transmits an audio signal through the network (Dante). It also supports a USB power supply and PoE function. The product is compact, easy to carry, plug, and play, and suitable for recording studios, art festivals, concerts, and other scenes.

## 2. Features

- ☆ Compliant with USB 2.0 Full Speed Operation
- ☆ Compliant with USB Audio Device Class Specification V1.0
- ☆ Analog sound card, supporting MIC input and SPK output
- ☆ Audio sampling rate supports 44.1kHz, 48kHz, and 96kHz (24bit)
- ☆ Dante solution supports AES67 RTP audio transmission
- ☆ Supports USB 5V power supply and PoE function (IEEE802.3af Class 0)


## 3. Package Contents

- ① 1× Dante 2CH USB Audio Encoder/Decoder
- ② 1× USB Cable (6FT USB A to USB B)
- ③ 1× User Manual

## 4. Specifications


<b>Technical</b>	
Video Network Bandwidth	100M
Audio Formats	PCM 2.0 44.1kHz/48kHz/96kHz up to 24bit
Transmission Distance	100m (Cat 6/6A)
Frequency Response	20Hz to 20kHz
Control Method	Dante Controller
<b>Connection</b>	
Input & Output	1x USB-B 1x DANTE [RJ45 connector, PoE]
<b>Mechanical</b>	
Housing	Metal Enclosure
Color	Black
Dimensions	120mm[W] x 47mm[D] x 26mm[H]
Weight	188g
Power Supply	USB input: 5V-500MA PoE input: IEEE802.3af Class 0
Power Consumption	1W
Operation Temperature	32 - 104°F / 0 - 40°C
Storage temperature	-4 - 140°F / -20 - 60°C
Relative Humidity	20 - 90% RH (Non-Condensation)

## 5. Operation Controls and Functions



No.	Name	Function Description
1	USB (FROM PC)	(1) 2-channel USB digital audio signal port: L/R mixed input and L/R stereo output. (2) USB 5V power input port.
2	DANTE (PoE)	Dante digital audio input and output port. Connect to the Network Switch through the RJ45 line, supporting the PD power supply. The green LINK LED is always on after a standard connection. The yellow DATA LED flashes when there is data transmission.

## 6. Application Example

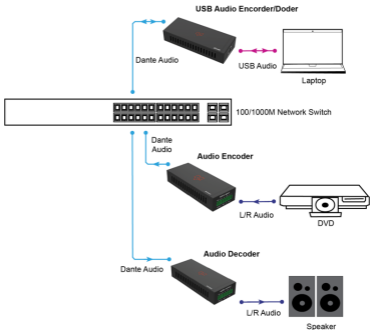

### Trademarks

Dante® is a registered trademark of Audinate Pty Ltd. All other trademarks are the property of their respective owners.