



VLSP-AS12H20

1x2 HDMI 2.0 Splitter /w Audio

De-embedded & Downscale 18Gbps



User Manual

VER 1.0

Thank you for purchasing this product

Please read these instructions carefully for optimum performance and safety before connecting, operating, or adjusting this product. Please keep this manual for future reference.

A surge protection device recommended

This product contains sensitive electrical components that electrical spikes may damage, surges, electric shocks, lightning strikes, etc. The use of surge protection systems is highly recommended to protect and extend the life of your equipment.

Table of Contents

1. Introduction	3
2. Features	3
3. Package Contents	4
4. Specifications	5
5. Operation Controls and Functions	7
5.1 Front Panel.....	7
5.2 Rear Panel.....	8
6. Application Example	9

1. Introduction

The 1x2 HDMI 2.0 Splitter simultaneously routes one HDMI source to two HDMI displays. Supporting resolutions up to 4K2K@60Hz (4:4:4) and HDCP 2.2. The VLSP-AS12H20 can extract audio from the HDMI source to optical and analog outputs. Selecting: COPY, AUTO modes EDID settings. Output supports bypass and downscale(4K->1080P) functions.

2. Features

- ☆ HDMI 2.0b, HDCP2.2/HDCP1.4 compliant.
- ☆ Supports HDMI resolution the maximum up to 4K2K@50/60Hz (4:4:4)
- ☆ Supports digital and analog audio extract output from HDMI source.
- ☆ Supports output bypass and 4K->1080P downscale

function via dial switch on the panel.

- ☆ EDID can be selected COPY and AUTO modes via a dial switch on the panel.

(COPY: It copies OUT 1 port EDID setting to all outputs port;

AUTO: Compare OUT 1 and OUT 2 EDID settings and output the best resolution to all outputs).

- ☆ Supports HDMI audio format LPCM, Dolby Digital/Plus/EX, Dolby True HD, DTS, DTS-EX, DTS-96/24, DTS High Res, DTS-HD Master Audio, DSD

3. Package Contents

- ① 1× 1×2 HDMI 2.0 Splitter
- ② 1× 5V/1A Power Adapter
- ③ 1× User Manual


4. Specifications

Technical	
HDMI Compliance	HDMI 2.0b
HDCP Compliance	HDCP 2.2 and HDCP 1.4
Video Bandwidth	18Gbps
Video Resolutions	720P50/60Hz, 1080P50/60Hz, 4K2K24Hz, 4K2K30Hz, 4K2K@50/60Hz (4:4:4)
Color Depth	4K60Hz 8-bit, 1080P 12-bit
Color Space	RGB, YCbCr 4:4:4, YCbCr 4:2:2
HDMI Audio Formats	LPCM, Dolby Digital/Plus/EX, Dolby True HD, DTS, DTS-EX, DTS-96/24, DTS High Res, DTS-HD Master Audio, DSD
L/R Audio Formats	PCM 2.0
Optical Audio Formats	LPCM [2.0/2.1]CH, Dolby 5.1, Dolby True HD, Dolby DD+, DTS 5.1, DTS-ES 6, DTS-HDMA 5.1, DTS HD-HRA 5.1
ESD Protection	Human-body Model: $\pm 8\text{kV}$ (Air-gap discharge) , $\pm 4\text{kV}$ (Contact discharge)
Connections	

Input ports	1×HDMI Type A [19-pin female]
Output ports	2×HDMI Type A [19-pin female] 1×L/R Audio out [3.5mm Stereo Mini-jack] 1×Optical out [S/PDIF]
Mechanical	
Housing	Metal Enclosure
Color	Black
Dimensions	120mm(W)×62.5mm(D)×14mm(H)
Weight	166g
Power Supply	Input: AC100~240V 50/60Hz, Output: DC5V/1A (US/EU standards, CE/FCC/UL certified)
Power Consumption	2.8W (max)
Operating Temperature	0° C ~ 40° C / 32° F ~ 104° F
Storage Temperature	-20° C ~ 60° C / -4° F ~ 140° F
Relative Humidity	20~90% RH (non-condensing)

5. Operation Controls and Functions


5.1 Front Panel

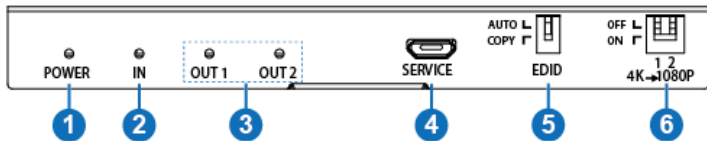

Number	Name	Function description
1	POWER LED	This blue LED will illuminate when the unit has a connected power supply.
2	HDMI INPUT LED	This blue LED will illuminate when the HDMI IN has connected an active HDMI source device with an HDMI cable.
3	HDMI OUTPUT LED	These blue LEDs will illuminate when the HDMI OUT port has connected an active display device with an HDMI cable.
4	SERVICE port	Firmware update used. (Manufacturer use only.)
5	EDID	AUTO: Compare OUT 1 and OUT 2 display EDID setting, then output the best resolution to the source device; the source will transmit the signal again to all outputs.

		COPY: Copy the HDMI OUT 1 port EDID setting to the source device; the source device will transmit the signal again to all outputs.
6	Dial switch (4K→ 1080P)	OFF: When the dial switch is dialed in the 'OFF' position, signal input and output are bypass status. ON: When dialing the dial switch in the 'ON' position, signal input will downscale(4k->1080P) output.

5.2 Rear Panel

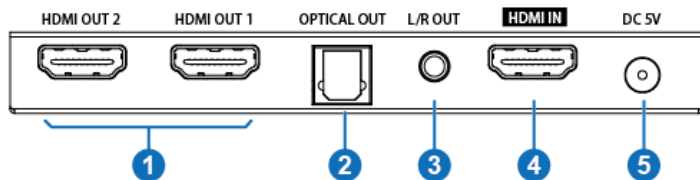

Number	Name	Function description
1	HDMI OUTPUT	Connect to an HDMI display device such as a TV or monitor.
2	OPTICAL OUT	Optical audio output.
3	L/R OUT	Analog audio output.

4	HDMI IN	Connect to HDMI source devices such as DVD player or PS4.
5	DC 5V	Plug the 5V/1A DC power supply into the unit and connect the adapter to an AC outlet.

6. Application Example

