

## 1x4 HDMI 2.0 Splitter /w Audio De-embedded & Downscale 18Gbps

The 1x4 HDMI 2.0 Splitter simultaneously routes one HDMI source to four HDMI displays. Supporting resolutions up to 4K2K@60Hz (4:4:4) and HDCP 2.2. This product supports audio extraction from HDMI source to optical and analog output(s) by selecting COPY, AUTO modes EDID settings. Output(s) supports bypass and downscale(4K->1080P) functions.

### Featured Highlights

- HDMI 2.0b, HDCP2.2/HDCP1.4 compliant.
- Supports HDMI resolution the maximum up to 4K2K@50/60Hz (4:4:4)
- Supports digital and analog audio extract output from HDMI source.
- Supports output bypass and 4K->1080P downscale function via dial switch on panel.
- EDID can be selected COPY and AUTO modes via dial switch on panel.
- Supports analog audio PCM 2.0.
- Supports optical audio pass-through format about LPCM 2.0/2.1/5.1CH, Dolby 5.1, Dolby True HD, Dolby DD+, DTS 5.1, DTS-ES 6/DTS-HDMA 5.1, DTS HD-HRA 5.1.

**TECHNICAL**

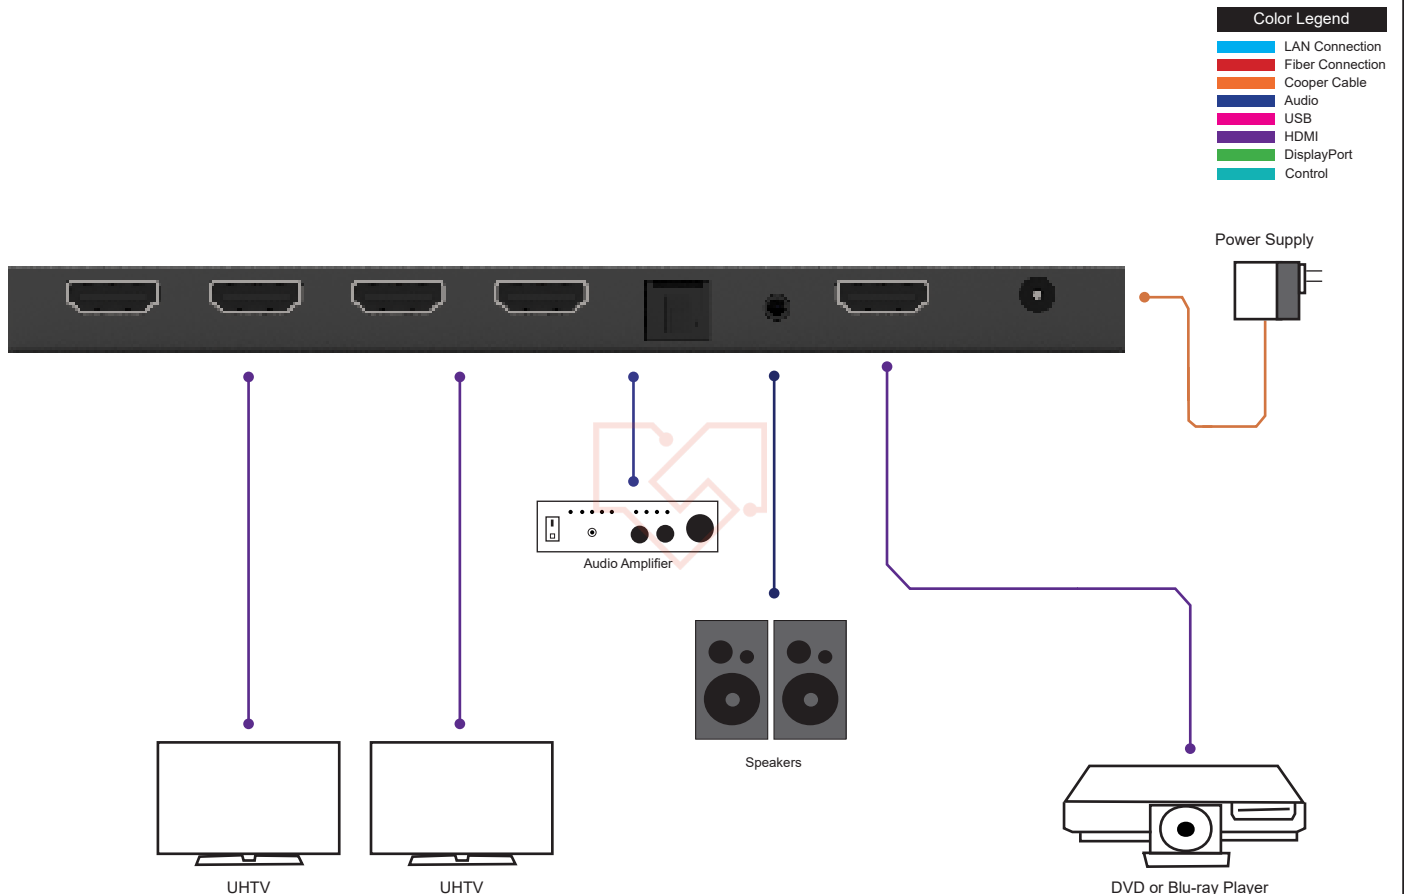
<b>HDMI Compliance</b>	HDMI 2.0b
<b>HDCP Compliance</b>	HDCP 2.2 and HDCP 1.4
<b>Video Bandwidth</b>	18Gbps
<b>Video Resolutions</b>	720P50/60Hz, 1080P50/60Hz, 4K2K24Hz, 4K2K30Hz, 4K2K@50/60Hz (4:4:4)
<b>Color Depth</b>	4K60Hz 8-bit, 1080P 12-bit
<b>Color Space</b>	RGB, YCbCr 4:4:4, YCbCr 4:2:2
<b>HDMI Audio Formats</b>	LPCM, Dolby Digital/Plus/EX, Dolby True HD, DTS, DTS-EX, DTS-96/24, DTS High Res, DTS-HD Master Audio, DSD
<b>L/R Audio Formats</b>	PCM 2.0
<b>Optical Audio Formats</b>	LPCM [2.0/2.1]CH, Dolby 5.1, Dolby True HD, Dolby DD+, DTS 5.1, DTS-ES 6, DTS-HDMA 5.1, DTS HD-HRA 5.1
<b>ESD Protection</b>	Human-body Model) ±8kV (Air-gap discharge) , ±4kV (Contact discharge)

**CONNECTIONS**

<b>Input ports</b>	1×HDMI Type A [19-pin female]
<b>Output Ports</b>	4×HDMI Type A [19-pin female] 1×L/R Audio out [3.5mm Stereo Mini-jack] 1×Optical out [S/PDIF]

**MECHANICAL**

<b>Housing</b>	Metal Enclosure
<b>Color</b>	Black
<b>Dimensions</b>	180mm(W)×62mm(D)×14mm(H)
<b>Weight</b>	227g
<b>Power Supply</b>	Input: AC100~240V 50/60Hz, Output: DC5V/1A (US/EU standards, CE/FCC/UL certified)
<b>Power Consumption</b>	3.5W (max)
<b>Operation Temperature</b>	0°C ~ 40°C / 32°F ~ 104°F
<b>Storage Temperature</b>	-20°C ~ 60°C / -4°F ~ 140°F
<b>Relative Humidity</b>	20~90% RH (Non-Condensation)

**APPLICATION EXAMPLE**

**Applications**

Digital Signage, Conference Rooms, Operating Rooms and Audio-Video Rooms