# PRODUCT LINE-UP

GeoBox Multi-function video processor

2023 Fall





# **GeoBox for Projector Applications**

## Edge Blending



## **Projection Mapping**




## Corner Wall display



## Warp/Geometry Alignment



## Active/Passive 3D Display

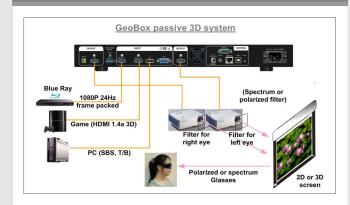

#### Immersive Display



## Big Scale Simulation system




## Flexible Multi-video Display






## Advanced Edge Blending Technology

## 9 region black level uplift



## Edge mask & Independent RGB gamma correction



## **Edge Blending Processor**



Edge Blending Processor Comparison Chart									
<u>Function/Series</u>	<u>UD100</u>	<u>M810</u>	M800Ex	<u>G810</u>	UD101 Lite	M811 Lite			
Model #	UD101 (1 CH) UD102 (2 CH) UD103 (3 CH) UD104 (4 CH)	M811 (1 CH) M812 (2 CH) M813 (3 CH) M814 (4 CH)	M801Ex (1 CH) M802 Ex (2 CH) M803 Ex (3 CH) M804 Ex (4 CH)	G812 (2 CH) G814 (4 CH)	UD101L (1 CH) (Warping Processor)	M811L (1 CH) (Warping Processor)			
I/O resolution	4k2k/60, 8k2k/30 IN 4k2k @60 OUT	4k2k/60, 8k2k/30 IN WUXGA OUT	4k2k/60, 8k2k/30 IN WUXGA OUT	4k2k/60, 8k1k/30 IN WUXGA OUT	4k2k/60, 8k2k/30 IN 4k2k @60 OUT	4k2k/60, 8k2k/30 IN WUXGA OUT			
Input port	HDMI 2.0, DP1.4	HDMI 2.0, DP1.2, VGA	HDMI 2.0, DP1.2, VGA	HDMI 2.0, DP1.2, VGA	HDMI 2.0, DP1.4	HDMI 2.0, DP1.2, VGA			
Max. input resolution	7680*2160/30 7680*1200/60	7680*2160/30 7680*1200/60	7680*2160/30 7680*1200/60	7680*1200/30	7680*2160/30 7680*1200/60	7680*2160/30 7680*1200/60			
Max. Output	4096*2160	1920*1200 2048*1080	1920*1200 2048*1080	1920*1200 2048*1080	4096*2160	1920*1200 2048*1080			
Loop out port	HDMI 2.0	HDMI 2.0	HDMI 2.0	HDMI 2.0	HDMI 2.0	HDMI 2.0			
Edge Blending	Same	4 Edges, H=1920, V=1200	Same	Same	NO	NO			
Black level uplift	Yes	Yes	Yes	Yes	NO	NO			
Gamma Correction for overlap color fine-tune	Yes	Yes	Yes	Yes	NO	NO			
Edge Mask	Yes	Yes	Yes	Yes	NO	NO			
PIP/POP	PIP/POP & Quad- View	Yes	NO	No	PIP/POP & Quad- View	Yes			
System control	IR/Keypad/RS232/ USB/ Ethernet	IR/Keypad/RS232/ USB/ Ethernet	IR/Keypad/RS232/ USB/ Ethernet	IR/RS232/USB/ Ethernet	IR/Keypad/RS232/ USB/ Ethernet	IR/Keypad/RS232/ USB/ Ethernet			
PC Tool	GCT	GCT	Gwarp3	GCT	GCT	GCT			
Geometry alignment	Up to 17x9 with 120x68 fine-tune,	Up to 17x9 with 120x68 fine-tune,	IR controller up to 9x5 PC Tool: 17x17	Up to 17x9 with 120x68 fine-tune,	Up to 17x9 with 120x68 fine-tune,	Up to 17x9 with 120x68 fine-tune,			
Projection mapping	No	No	Yes	No	No	No			

## M811 M812 M813 M814

Modularized 1-4 CH 8k/2k 30fps, 4k/60 60fps Seamless Edge Blending Processor




#### Modularized design

- Select different models based on the number of the projector: M811 (1-CH), M812 (2-CH), M813 (3-CH), M814 (4-CH)
- All models can be cascaded through loop out daisy chain connection.

#### Independent RGB Gamma correction

Independent RGB gamma correction to get optimized image quality.



#### Flexible configuration



#### Projection mapping (in M800Ex models)

Image mask at any location of the image through upload simple pattern to provide professional projection mapping.









#### PIP / POP (PBP)

- PIP/POP at landscape and portrait position.
- Flexible PIP position, aspect ratio, cropping position and size from 160\*90 to 1920\*1200.



## Immersive display

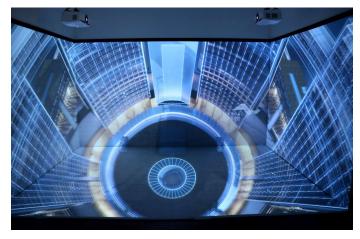




## Flexible system for all kinds of video wall



## G406 with matrix switch function

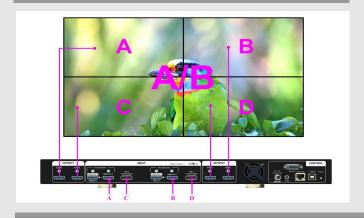

## G408/G406/G406L/G406s

4k in / 2k out Creative video wall controller with monitors at portrait and landscape directions




#### UHD video wall controller

G900 supports UHD in/out. Display all-in-one big image or discrete content in each monitor.



## True 8k video wall with pixel to pixel video quality

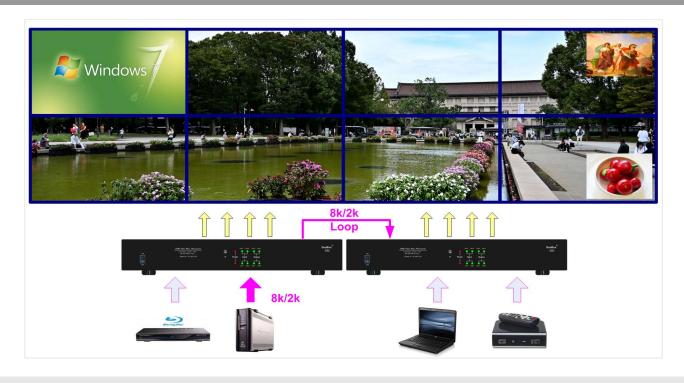



## G413

G413 is world unique product that can create asymmetric video wall with LCDs at any angle and position without PC system. User can use preset modes selected from OSD menu or remote controller to adjust the image position.



#### Creative asymmetric video wall

Create irregular video wall by Pre-set mode or manual mode for LCD at any location and angle.



#### PIP/POP

PIP/POP can be implemented across 4 outputs with different PIP size and location.








POP Maintain original aspect ratio






#### G413 Flexible configuration


27 predefined display modes selected by OSD.

Customized video wall with LCD at any location.



#### Multiple units cascaded

Multiple unit cascade is available for large scale display. Preset modes can be used for multiple unit cascade to save setup time.



#### Image continuous rotation

+-180 degree image rotation with one degree interval









#### 8K/4k video wall with pixel to pixel quality

G900 can support 8k/2k input with 4k/60 output in each output channel. True 8k2k 60Hz video wall with pixel to pixel quality can be achieved by cascading with multi-units.



#### Multi-windows display in one monitor

One G904 can display up to 6 windows in one monitor. Multiple units cascade will provide unlimited windows, such as 9/12/16...




## G902/G904

New generation 8k/2k input, 4k/2k 60fps output Video Wall controller with multi-viewer function

G900 is 4k monitor video wall controller and ideal front end processor for large scale display to support 8k/2k input and programmable output resolution up to 7680x2160. It can aslo serve as MultiViewer. It also provides PIP/POP, 3/4 split views function. Three models in this series: G901: one output channel, G902: two channels, M904: 4 channels.


#### 4k/60 discrete content in 4k monitors

Flexible to create video wall with one content across entire video wall or discrete true 4k/2k content in each monitor with pixel to pixel video quality.

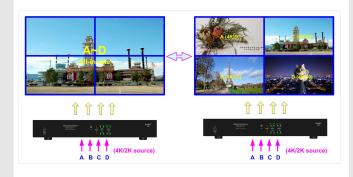

#### LED display front end processor

G900 can crop accurate image position with programmable output resolution and refresh rate up to 7680\*2160/120Hz for any big scale display.

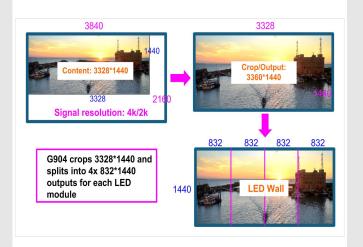

#### Warp and geometry alignment



#### Image rotation, crop and aspect ration adjustment

iPad/iPhone image can be rotated with full screen display on portrait monitor.




#### UD101L/M811L Warping Box

UD101L is for UHD and M811 is for WUXGA. single channel processor for image warping, rotation, PIP/POP and 3D format conversion.



#### G901 Medical 3D format converter



All HDMI 3D formats including line by line and dual camera 3D formats can be converted into frame squential, side by side or Top/Bottom 3D formats.

#### G901Front end processor



Seamless switch with quad MultiViewer

- Input: 3x HDMI 2.0b + 2x DP 1.4
- -Output: 1x HDMI 2.0b, programmable output resolution and refresh rate..
- -PIP/POP/3/4 split views3D format conversion

#### S901 Seamless switcher with Quad views

S901 has the same function as G901 but add front keypad for easy input selection and operation. It is good for Live program.



#### Front end processor for projector edge blending system and video wall



Profile 1: All-In-One+PIP



Profile 2: Side by Side





Profile 3: 16:9 aspect ratio



G901/S901 serves as seamless switcher and provide PIP/POP/3/4 split views. Different display profiles can be saved and recalled at any time by IR control, network and RS232.


Category  Model name			E	dge Blendir	ng process	or		4K Edge Blending processor			
		G812	G814	M811	M812	M813	M814	UD101	UD102	UD103	UD104
Video input	HDMI	2	4	2	4	6	8	3	6	9	13
	DisplayPort	1	2	1	2	3	4	1	2	3	4
	VGA	1	2	1	2	3	4				
Video	HDMI (2k/1k)	2	4	1	2	3	4	1	2	3	4
output	HDMI Loop Out	1	2	1	2	3	4	1	2	3	4
Max. input 8k/1k/30, 4k/60 4:4:4		8k/1k	8k/1k	8k/2k	8k/2k	8k/2k	8k/2k	8k/2k	8k/2k	8k/2k	8k/2k
Max. output		2048*1080	2048*1080	2048*1080	2048*1080	2048*1080	2048*1080	4k/2k/60	4k/2k/61	4k/2k/62	4k/2k/63
Front panel button				*	*	*	*		*	*	*
Latency				33ms							
HDCP 1.4/2.2		*	*	*	*	*	*	*	*	*	*
	Image split	•	•	•	•	•	•	•	•	•	•
Main function	Geometry alignment	•	•	•	•	•	•	•	•	•	•
	Edge Blending	•	•	•	•	•	•	•	•	•	•
	Rotation and flip	•	•	•	•	•	•	•	•	•	•
	PIP / POP			•	•	•	•	•	•	•	•
PC Tool	GCT	•	•	•	•	•	•	•	•	•	•
	Galign										
	UHD Wall Manager										
	Warranty period		2 years (Max. up to 5 years								






Video Wall 4k in/ 2k out				o wall 4k out	('rootuvo   Nilliti_filipotion			n Image processor		Mini Box	
G406	G406S	G406L	G408	G902	G904	G413	S901/G901	UD101L	M811L	G111	G112
2	1	1	2	5	10	2	3	3	2	1	1
2						1	2	1	1		
						1			1		
4	2	1	2	2	4	4	1	1	1	1	1
2	1	1	2	1	2	1		1	1	1	1
8k/1k	8k/1k	8k/1k	8k/1k	8k/2k	8k/2k	8k/2k	8k/2k	8k/2k	8k/2k	4k/2k/30	4k/2k/30
2048*1080	2048*1080	2048*1080	2048*1080	4k/2k/60	4k/2k/60	1920*1200	4k/2k/60	4k/2k/60	2048*1080	2048*108 1	2048*108
*								*	*		*
	16ms				33ms	16ms	33ms	33ms	33ms	33ms	
*	*	*	*	*	*	*	*	*	*	*	*
•	•	•	•	•	•	•	•		•	•	•
									•	•	•
											•
•	•	•	•	•	•	•	•		•	•	•
				•	•	•	•		•		
									•		
						•					
•	•	•	•	•	•		•				
	2 years (Max. up to 5 years)										

## Before Edge Blending



#### After Edge Blending







Connecting For A Smarter Future

#### **USA Authorized Distributor**

1100 Town & Country Road, Suite 1250, Orange, C2868 Tel: 949-502-4484

Website: https://www.vigillink.com/

All information included here is valid as August 2023. Specifications and appearance are subject to change without notice. Product availability differs depending on region and country. All right reserved.